

A-MeP FOR MVR - MFR

TECHNICAL DATASHEET

A-MeP Automatic extrusion plastometer is an extremely reliable instrument to meet all laboratory requirements, both for quality control and for R & D. A-MeP allows the determination of the Melt Flow Rate, basic test to characterize thermoplastic materials, in strict accordance with the International standards, with an automatic procedure. Beyond the determination it allows you to enter data with touch screen.



Reference standards

ASTM	D1238 Meth. A-B	D2116	D3159	D3364
ISO	1133			
UNI	5640			


Technical features:



- Touch screen interface, colour LCD

Settings and data management
Display of the last test performed
Facility to reject odd values, with reference to either other determinations, or tested material, or both

- Integrated microprocessor for test management.
- PID electronic thermoregulation system with microprocessor –accuracy 0.1°C, working temperature: 80° ÷ 400°C.
- Configuration of the test parameters (temperature, pre-heating time, space of acquisition, density of the material, add-on weight): 28 preset conditions.
- Detection of 10 to 50 measurements each sample
- Automatic weight lifter (4 weights) fully governed by the control electronics in order to perform easily: material pressing, pre-heating with or without add-on weight, repeatability of the test starting position.
- Masses to reach 2.16, 3.8, 5.0, 10.0, 21.6 kg add-on weights
- Thermal stability: ±0.2°C in the test area.
- Test chamber: Ø 9.55 mm, steel (52/55 HRC).
- Piston: Ø 9.474 mm, height of the pressing part 6.35 mm, steel (45/50 HRC), equipped with thermally insulated guiding double collar, weight 0.325 g.
- Die: inner Ø of the hole 2.095 mm, length 8 mm, steel (60/65 HRC).
- The instrument is equipped with a cutting device of the extruded material, governed by an electronic timer which activates the blade automatically according to preset times, or operated manually any time, with a push-button.
- Tilting furnace for easy cleaning of heating chamber
- Heating system
- USB port for PC connection
- Dimensions: 600 x 430 x 860/900 h mm
- Weight: approx. kg 80
- Power supply: 230V, 50Hz, 0.5 kVA

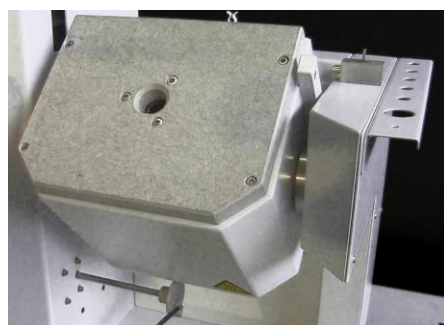

Tilting furnace for easy cleaning of heating chamber



Standard configuration includes:


- Standard die (inner hole Ø2,09x8h mm)
- Funnel for sample loading
- Tool for sample pressing
- Die cleaning tool
- Scraping tool for test chamber cleaning
- Swabber tool for test chamber cleaning
- Split head tool to accommodate cloth for test chamber cleaning
- Set of spare blades for the cutting device (5 pcs.)



Optional


A-MeP Link Software

- Graphic display of the data
- Display of the last test performed
- Facility to reject odd values, with reference to either other determinations, or tested material, or both.
- Calculation of the average value and of the standard deviation of the accepted measurements.
- Data export in csv format (excel compatible)
- Print-out of the current or filed determinations, with average and value and standard deviation

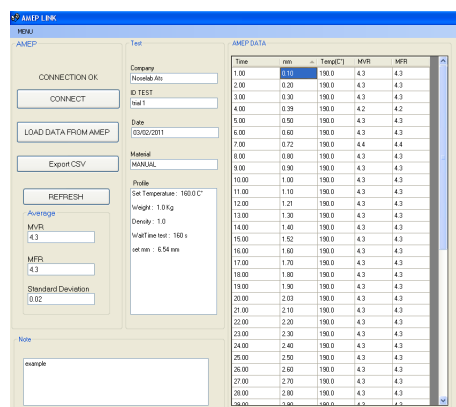

Lifting System

When choosing the weights to be used is needed turn the handwheel in the desired direction until the reference notch matches the weight.

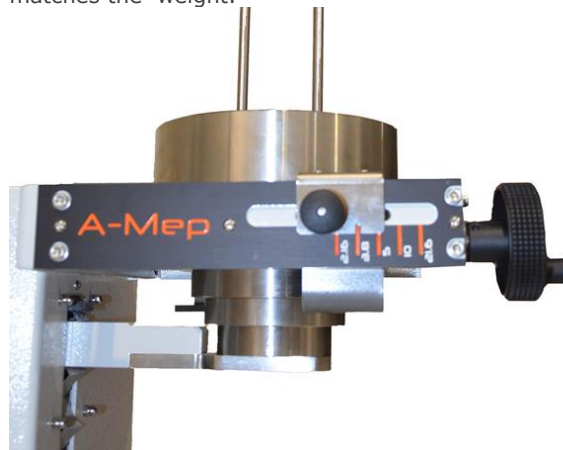

Hastelloy A-MeP

An A-MeP model for the performance of measurements of corrosive thermoplastics is also available. Test chamber, piston and die in Hastelloy are supplied. Other accessories as per Standard model.

In accordance with ASTM D 3364 the optional Hastelloy die (10002036) hole 2.095 mm, length 25.43 mm is also necessary.

Code	Description
10002215	Automatic Extrusion plastometer A-MeP
10002217	Automatic Hastelloy Extrusion plast. A-MeP
00100107	Software Amep Link

Dies for Melt Flow Rate

Code	Dimensions and material
10002023	Standard, 2,09 hole Ø x 8 h mm steel
10002024	Standard, 2,09 hole Ø x 25 h mm steel
10002019	Standard, 2,09 hole Ø x 8 h mm Hastelloy made
10002036	Standard, 2,09 hole Ø x 25,43 h mm, Hastelloy made, for determinations according to ASTM D 3364
10002015	1,18 hole Ø x 8 h mm, steel made
10002016	1,17 (± 0,01 mm) hole Ø x 8 h mm steel made
10002018	1,047 hole Øx 8 h mm, steel made

Control accessories

Code	Description
40300725	Digital bubble level
10002074	Go no-go gauge for standard die (inner dia of the hole 2.095 mm ± 0.005, length 8 mm) with calibration report
01020201	Certificate of calibration go no-go gauge
10002241	Nozzle plugging device-integrated sensor

